


VASCA IN ACRILICO DX 150X70


ACRYLIC BATHTUB RX 150X70

DATI TECNICI


TECHNICAL INFO

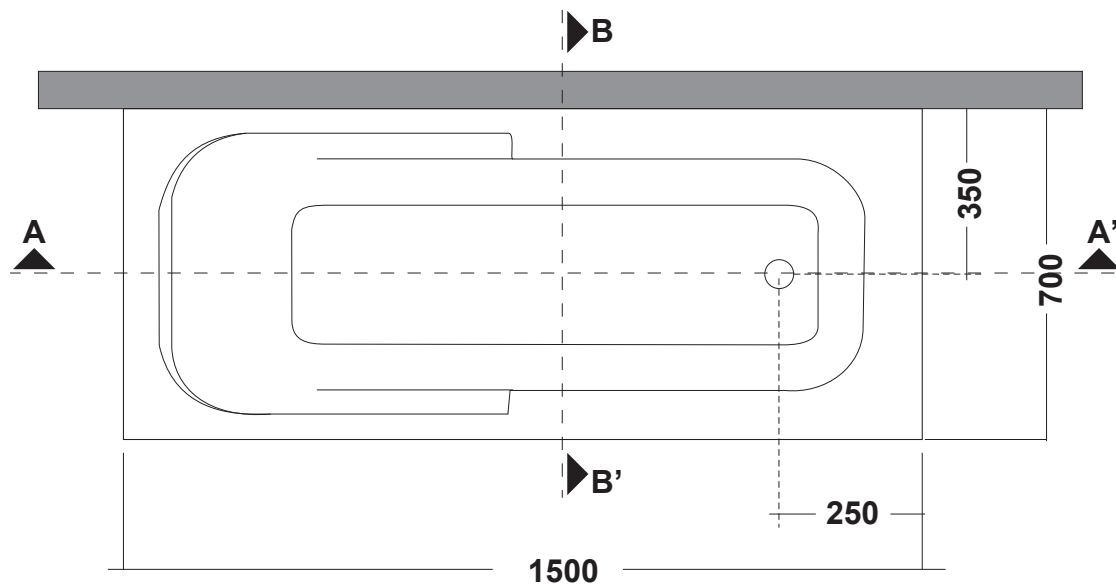

Vista in pianta
plan view

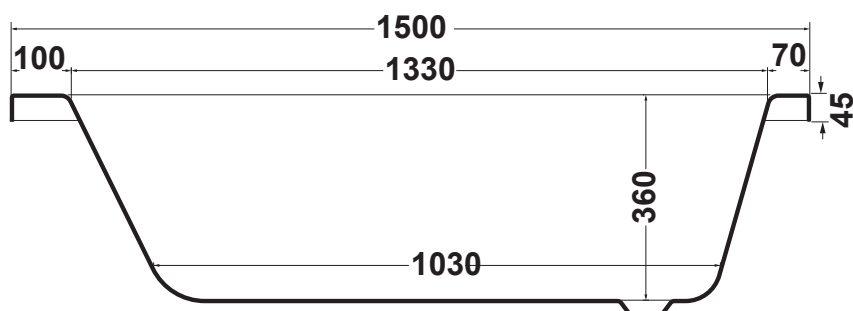

Sezione A/A'
Section A/A'

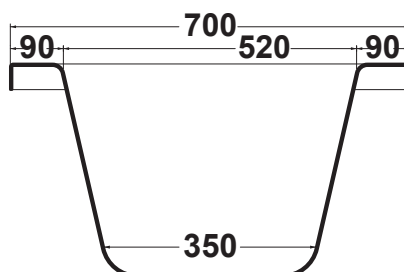


Sezione B/B'
Section B/B'

VASCA IN ACRILICO DX 150X70

ACRYLIC BATHTUB RX 150X70

DATI TECNICI

TECHNICAL INFO

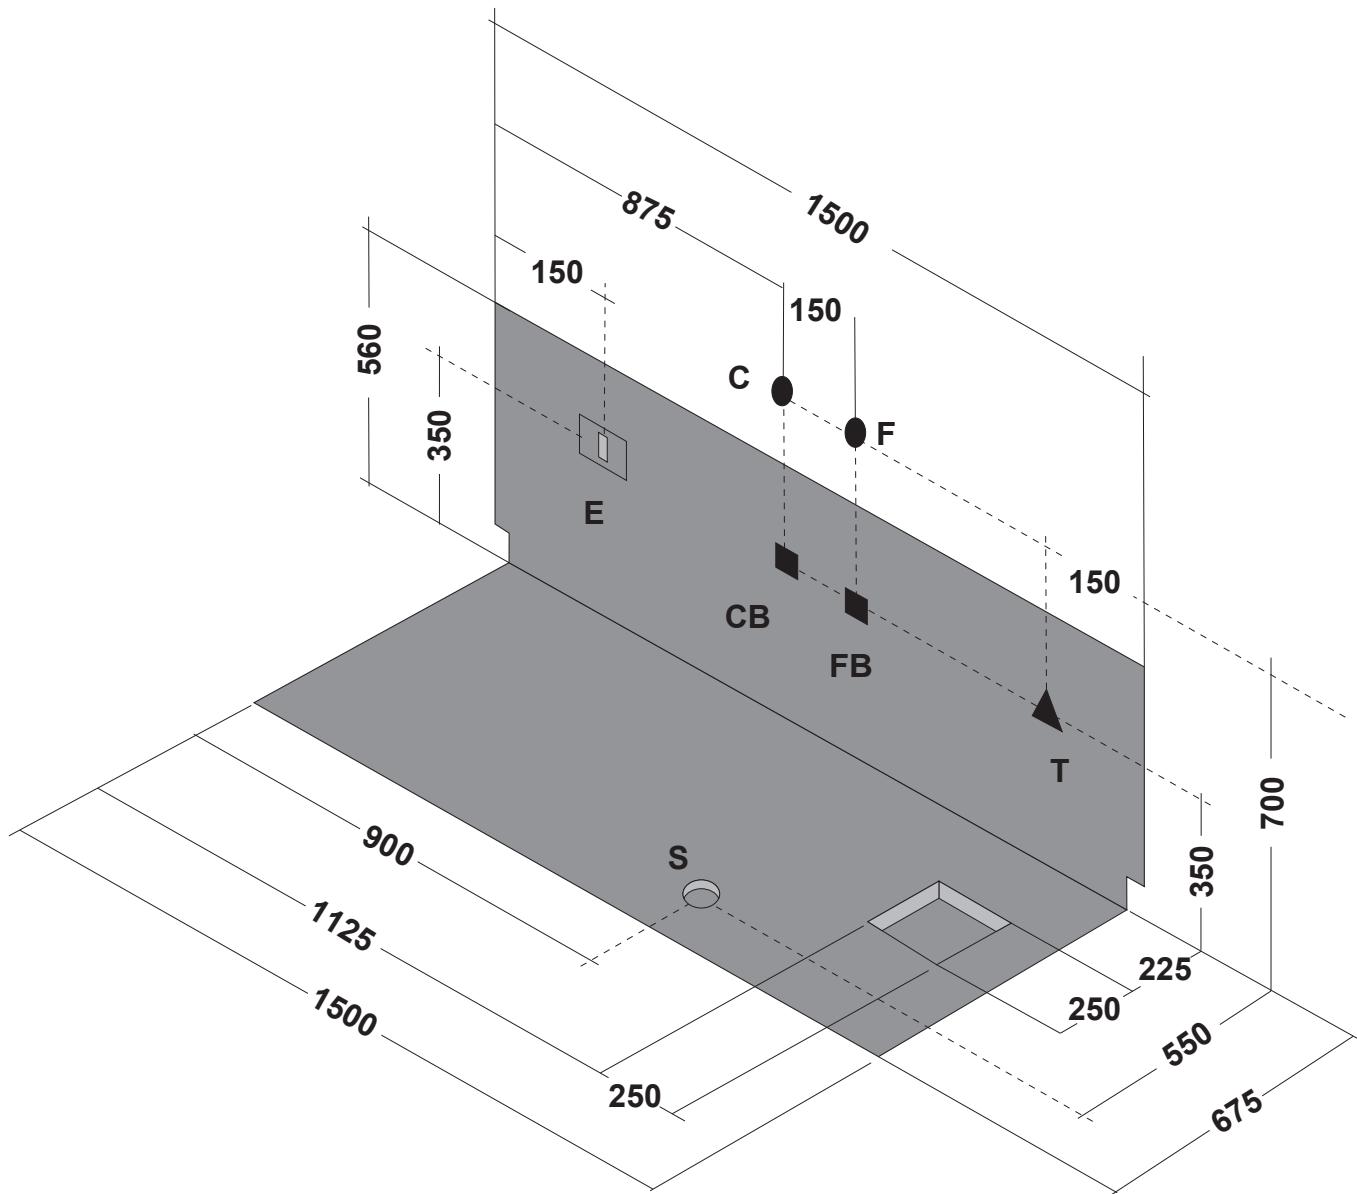

Ingombro vasca proiettato nel muro

Bath overall dimensions as projected on the wall

VASCA IN ACRILICO DX 150X70

ACRYLIC BATHTUB RX 150X70

DATI TECNICI

TECHNICAL INFO


I	CARATTERISTICHE IDRAULICHE	CARATTERISTICHE ELETTRICHE	REQUISITI DI PREINSTALLAZIONE	COMBINAZIONI RUBINETTERIA
N.B. L'INSTALLAZIONE DEVE AVVENIRE A PAVIMENTO E PARETI FINITE Peso netto: Kg 46 Peso spedizione: Kg 59 Volume spedizione: m3 = 0,832 Contenuto acqua Lt 110	Numero jets: 5	V 220/240	C : Allaccio acqua calda rubinetteria parete: 1/2"	C F : Rubinetteria parete ● ●
		HZ 50/60	F : Allaccio acqua fredda rubinetteria parete: 1/2"	
		KW 0.78	CB : Allaccio acqua calda bordo vasca: 1/2"	CFT: Rubinetteria parete con erogazione troppopieno ● ● ●
		A 5	FB : Allaccio acqua fredda bordo vasca: 1/2"	
			T : Allaccio miscelatore per erogazione da troppopieno: 1/2"	
			S : Allaccio scarico incassato a pavimento: 1-1/2"	CB BF: Rubinetteria bordo vasca ■ ■
			E : Allaccio elettrico idromassaggio IPX5	
GB	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	TAPS COMBINATION
N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALREADY TILED Net weight: Kg 46 total weight with package: Kg 59 Volume with package: m3 = 0,832 Water capacity Lt 110	Numero jets: 5	V 220/240	C : Wall taps outlet for hot water: 1/2"	C F : Wall taps ● ●
		HZ 50/60	F : Wall taps outlet for cold water: 1/2"	
		KW 0.78	CB : Bath edge taps outlet for hot water: 1/2"	CFT: Wall taps with water supply by overflowing ● ● ●
		A 5	FB : Bath edge taps outlet for cold water: 1/2"	
			T : Single outlet for mixed water to supply by overflowing: 1/2"	
			S : Drainage outlet installed in the floor: 1-1/2"	CB BF: Bath edge taps ■ ■
			E : Power outlet for the whirlpool IPX5	
F	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	TAPS COMBINATION
N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALREADY TILED Net weight: Kg 46 total weight with package: Kg 59 Volume with package: m3 = 0,832 Water capacity Lt 110	Numero jets: 5	V 220/240	C : Wall taps outlet for hot water: 1/2"	C F : Wall taps ● ●
		HZ 50/60	F : Wall taps outlet for cold water: 1/2"	
		KW 0.78	CB : Bath edge taps outlet for hot water: 1/2"	CFT: Wall taps with water supply by overflowing ● ● ●
		A 5	FB : Bath edge taps outlet for cold water: 1/2"	
			T : Single outlet for mixed water to supply by overflowing: 1/2"	
			S : Drainage outlet installed in the floor: 1-1/2"	CB BF: Bath edge taps ■ ■
			E : Power outlet for the whirlpool IPX5	

VASCA IN ACRILICO SX 150X70


ACRYLIC BATHTUB LX 150X70

DATI TECNICI


TECHNICAL INFO

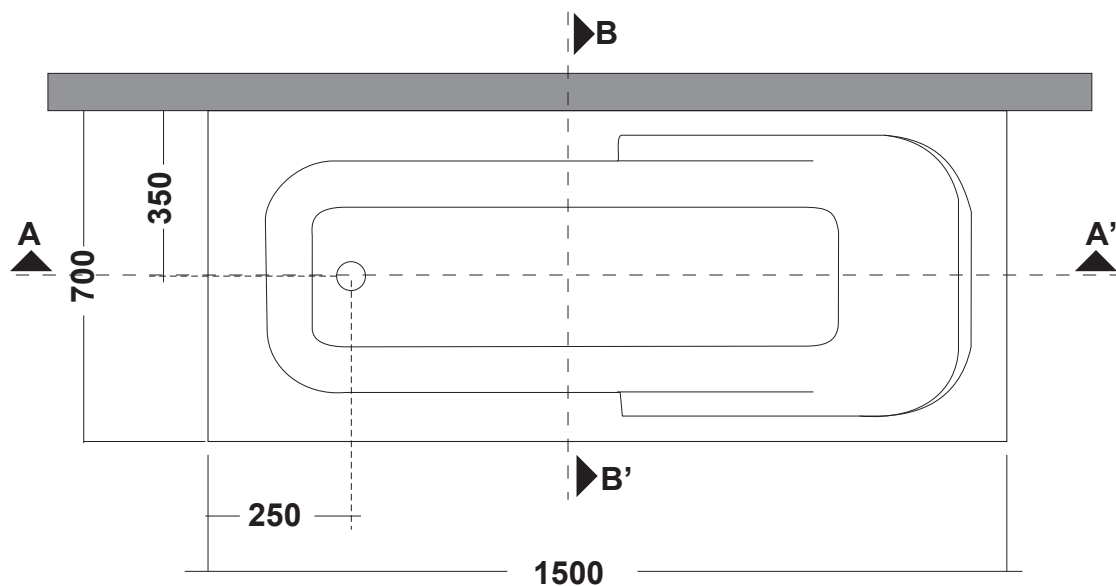

Vista in pianta
plan view

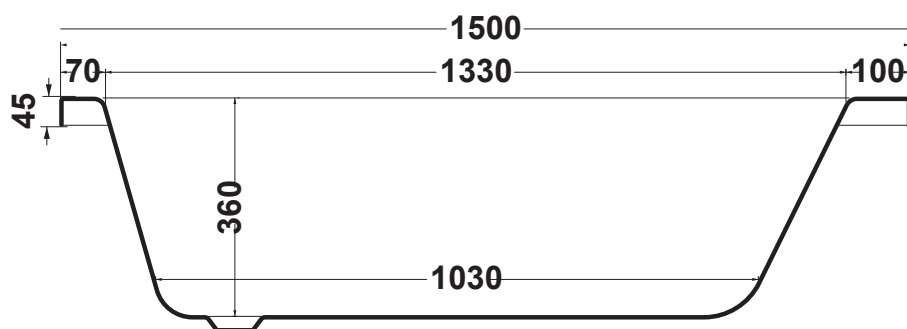

Sezione A/A'
Section A/A'

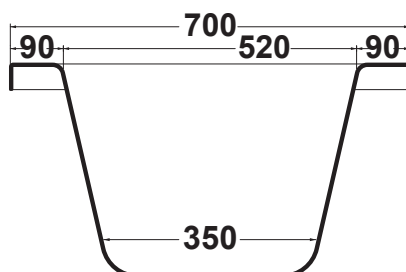


Sezione B/B'
Section B/B'

VASCA IN ACRILICO SX 150X70

ACRYLIC BATHTUB LX 150X70

DATI TECNICI

TECHNICAL INFO

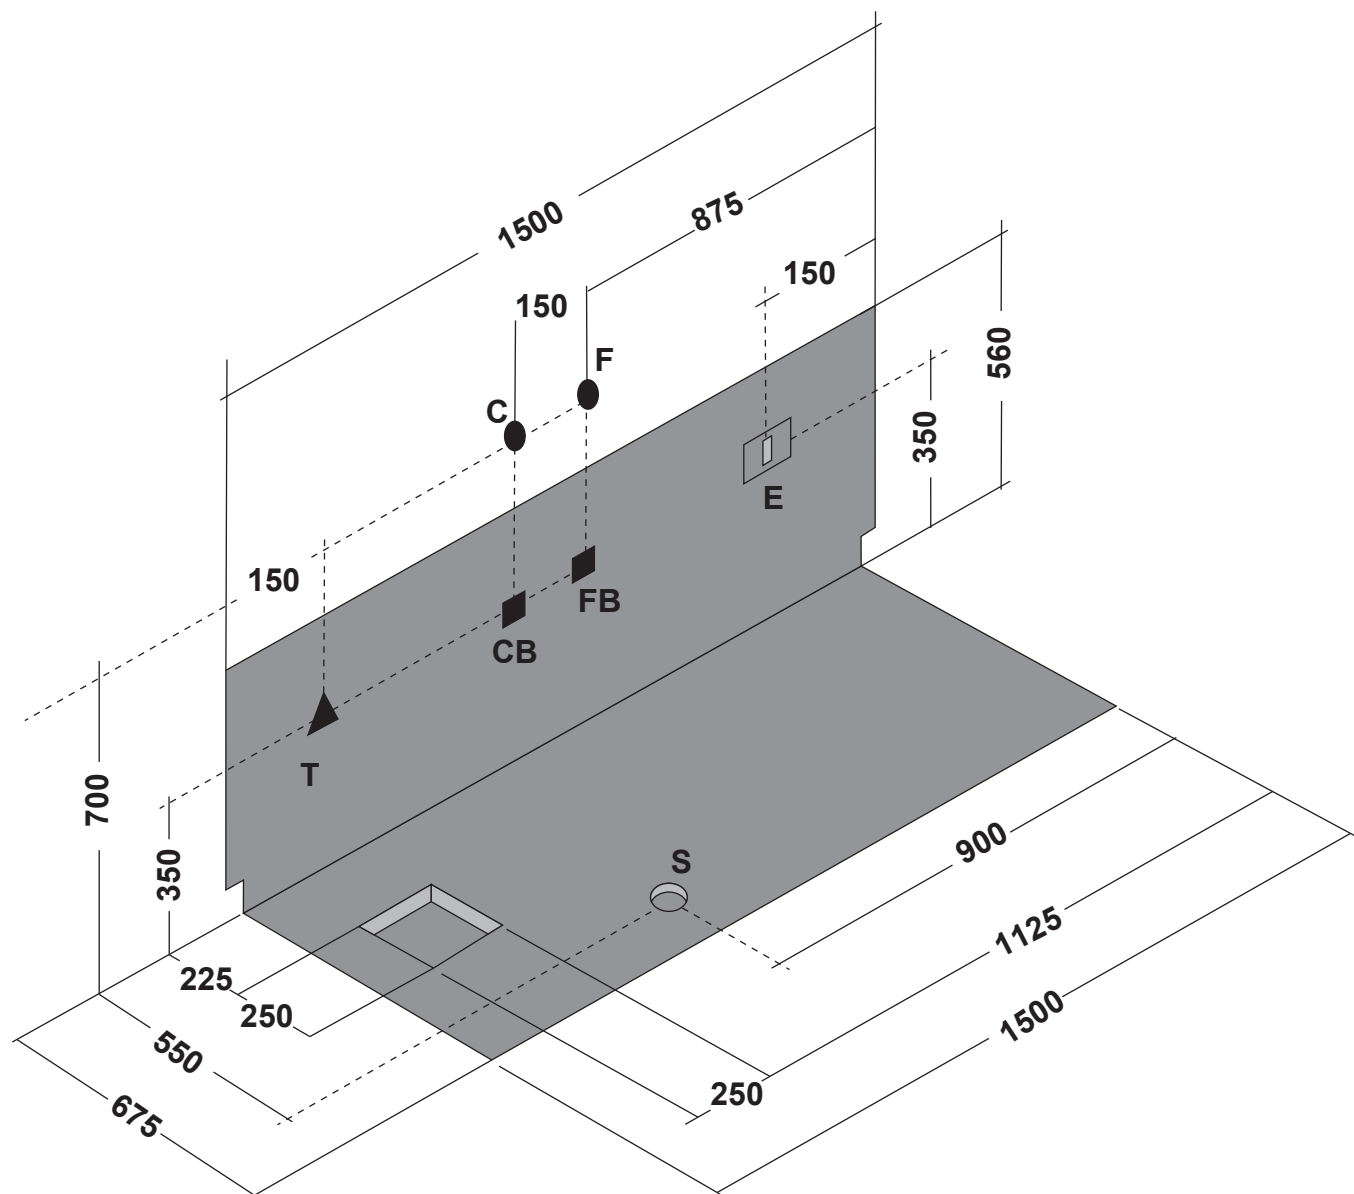

Ingombro vasca proiettato nel muro

Bath overall dimensions as projected on the wall

VASCA IN ACRILICO SX 150X70

DATI TECNICI

ACRYLIC BATHTUB LX 150X70

TECHNICAL INFO

I	CARATTERISTICHE IDRAULICHE	CARATTERISTICHE ELETTRICHE	REQUISITI DI PREINSTALLAZIONE	COMBINAZIONI RUBINETTERIA
N.B. L'INSTALLAZIONE DEVE AVVENIRE A PAVIMENTO E PARETI FINITE Peso netto: Kg 46 Peso spedizione: Kg 59 Volume spedizione: m3 = 0,832 Contenuto acqua Lt 110	Numero jets: 5	V 220/240	C : Allaccio acqua calda rubinetteria parete: 1/2"	C F : Rubinetteria parete ● ●
		HZ 50/60	F : Allaccio acqua fredda rubinetteria parete: 1/2"	CFT: Rubinetteria parete con erogazione troppopieno ● ● ●
		KW 0.78	CB : Allaccio acqua calda bordo vasca: 1/2"	
		A 5	FB : Allaccio acqua fredda bordo vasca: 1/2"	CB BF: Rubinetteria bordo vasca ■ ■
			T : Allaccio miscelatore per erogazione da troppopieno: 1/2"	
			S : Allaccio scarico incassato a pavimento: 1-1/2"	
			E : Allaccio elettrico idromassaggio IPX5	
GB	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	TAPS COMBINATION
N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALREADY TILED Net weight: Kg 46 total weight with package: Kg 59 Volume with package: m3 = 0,832 Water capacity Lt 110	Numero jets: 5	V 220/240	C : Wall taps outlet for hot water: 1/2"	C F : Wall taps ● ●
		HZ 50/60	F : Wall taps outlet for cold water: 1/2"	CFT: Wall taps with water supply by overflowing ● ● ●
		KW 0.78	CB : Bath edge taps outlet for hot water: 1/2"	
		A 5	FB : Bath edge taps outlet for cold water: 1/2"	CB BF: Bath edge taps ■ ■
			T : Single outlet for mixed water to supply by overflowing: 1/2"	
			S : Drainage outlet installed in the floor: 1-1/2"	
			E : Power outlet for the whirlpool IPX5	
F	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	TAPS COMBINATION
N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALREADY TILED Net weight: Kg 46 total weight with package: Kg 59 Volume with package: m3 = 0,832 Water capacity Lt 110	Numero jets: 5	V 220/240	C : Wall taps outlet for hot water: 1/2"	C F : Wall taps ● ●
		HZ 50/60	F : Wall taps outlet for cold water: 1/2"	CFT: Wall taps with water supply by overflowing ● ● ●
		KW 0.78	CB : Bath edge taps outlet for hot water: 1/2"	
		A 5	FB : Bath edge taps outlet for cold water: 1/2"	CB BF: Bath edge taps ■ ■
			T : Single outlet for mixed water to supply by overflowing: 1/2"	
			S : Drainage outlet installed in the floor: 1-1/2"	
			E : Power outlet for the whirlpool IPX5	