

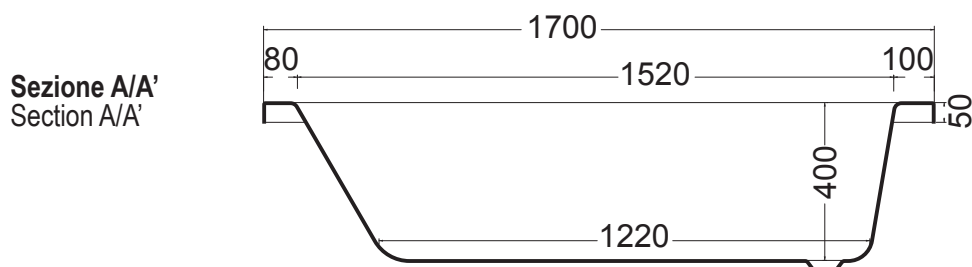



VASCA IN ACRILICO 170X70 DX

DATI TECNICI

ACRYLIC BATHTUB 170X70 RX

TECHNICAL INFO

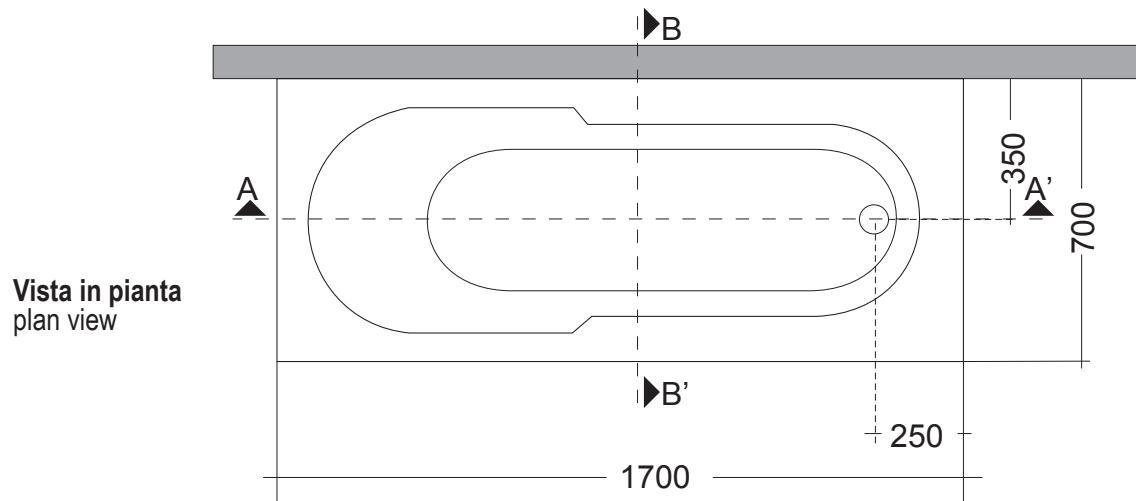

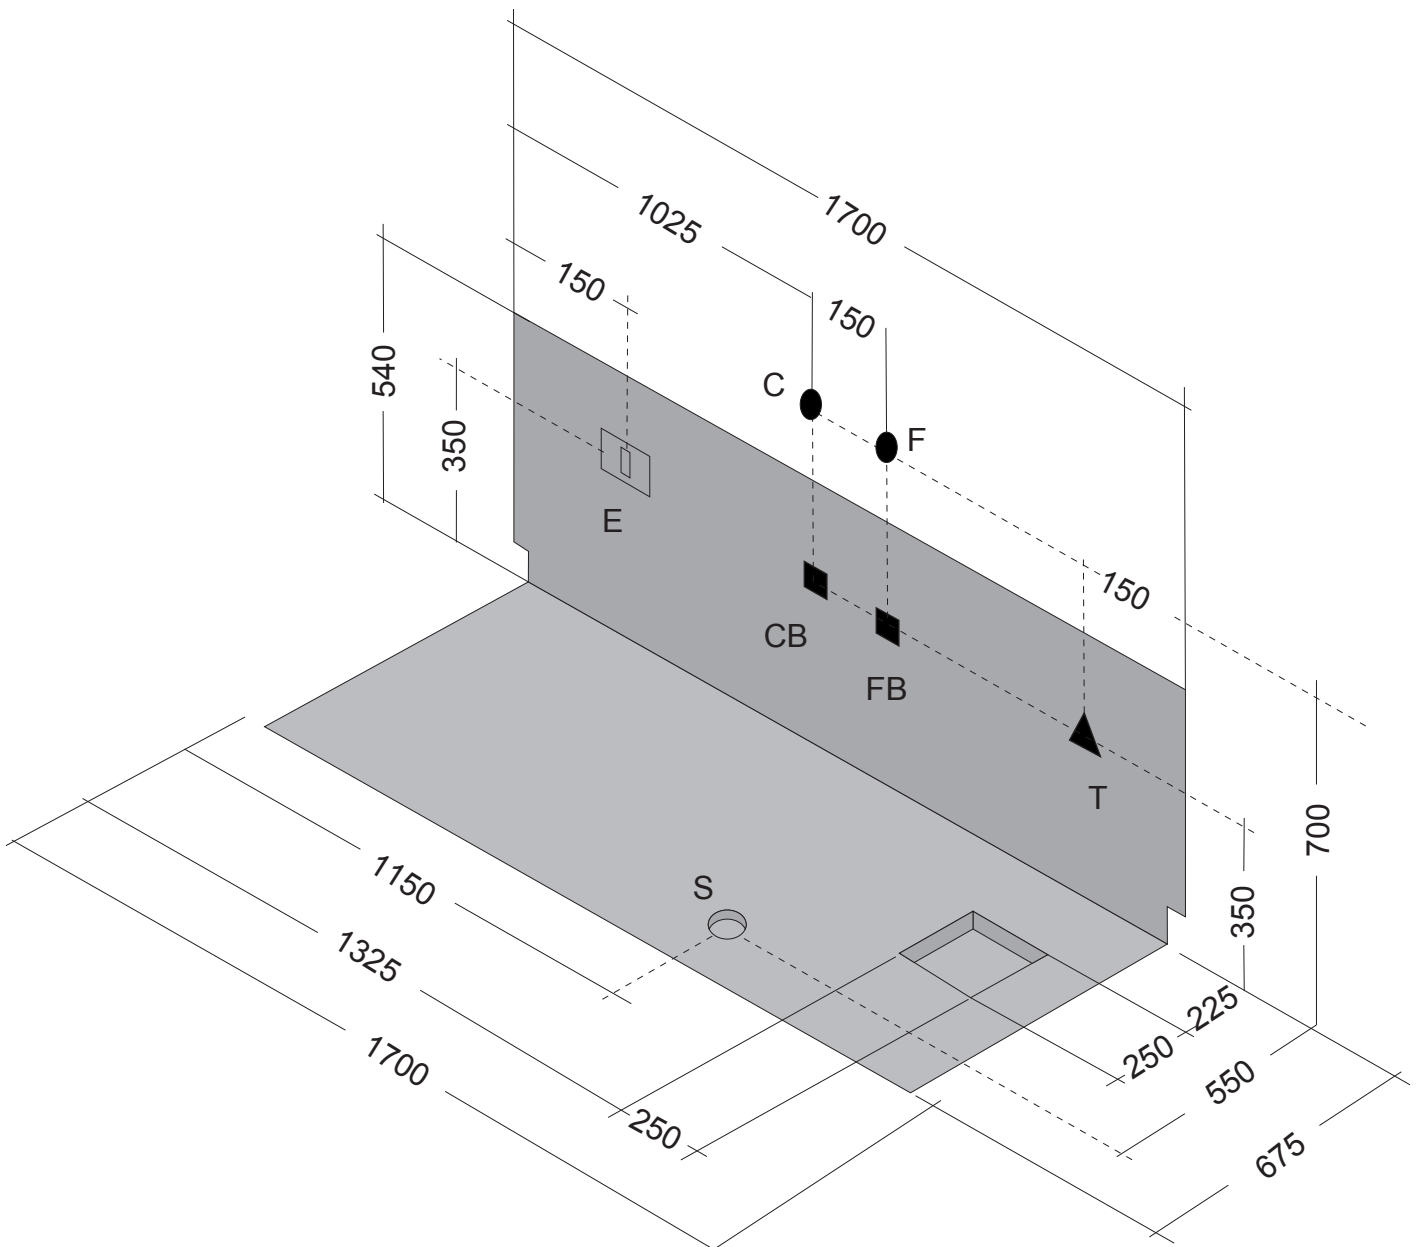

Ingombro vasca proiettato nel muro

Bath overall dimensions as projected on the wall

I	CARATTERISTICHE IDRAULICHE	CARATTERISTICHE ELETTRICHE	REQUISITI DI PREINSTALLAZIONE	COMBINAZIONI RUBINETTERIA
<p>N.B. L'INSTALLAZIONE DEVE AVVENIRE A PAVIMENTO E PARETI FINITE</p>	<p>Numero jets: 6</p>	<p>V 220/240</p>	<p>C : Allaccio acqua calda rubinetteria parete: 1/2"</p>	<p>C F : Rubinetteria parete ● ●</p>
<p>Peso netto: Kg 55</p>		<p>HZ 50/60</p>	<p>F : Allaccio acqua fredda rubinetteria parete: 1/2"</p>	<p>CFT: Rubinetteria parete con erogazione troppopieno ● ● ● ●</p>
<p>Peso spedizione: Kg 69</p>		<p>KW 0.78</p>	<p>CB : Allaccio acqua calda bordo vasca: 1/2"</p>	<p>CB BF: Rubinetteria bordo vasca ■ ■</p>
<p>Volume spedizione: m3 = 0,936</p>		<p>A 4,1/3,9</p>	<p>FB : Allaccio acqua fredda bordo vasca: 1/2"</p>	
<p>Contenuto acqua Lt 160</p>		<p>T : Allaccio miscelatore per erogazione da troppopieno: 1/2"</p>	<p>S : Allaccio scarico incassato a pavimento: 1-1/2"</p>	
		<p>E : Allaccio elettrico idromassaggio IPX5</p>	<p>E : Allaccio elettrico idromassaggio IPX5</p>	
GB	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	TAPS COMBINATION
<p>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED</p>	<p>Numero jets: 6</p>	<p>V 220/240</p>	<p>C : Wall taps outlet for hot water: 1/2"</p>	<p>C F : Wall taps ● ●</p>
<p>Net weight: Kg 55</p>		<p>HZ 50/60</p>	<p>F : Wall taps outlet for cold water: 1/2"</p>	<p>CFT: Wall taps with water supply by overflowing ● ● ● ●</p>
<p>total weight with package: Kg 69</p>		<p>KW 0.78</p>	<p>CB : Bath edge taps outlet for hot water: 1/2"</p>	<p>CB BF: Bath edge taps ■ ■</p>
<p>Volume with package: m3 = 0,936</p>		<p>A 4,1/3,9</p>	<p>FB : Bath edge taps outlet for cold water: 1/2"</p>	
<p>Water capacity Lt 160</p>		<p>T : Single outlet for mixed water to supply by overflowing: 1/2"</p>	<p>S : Drainage outlet istalled in the floor: 1-1/2"</p>	
		<p>E : Power outlet for the wirpool IPX5</p>	<p>E : Power outlet for the wirpool IPX5</p>	
F	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	TAPS COMBINATION
<p>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED</p>	<p>Numero jets: 6</p>	<p>V 220/240</p>	<p>C : Wall taps outlet for hot water: 1/2"</p>	<p>C F : Wall taps ● ●</p>
<p>Net weight: Kg 55</p>		<p>HZ 50/60</p>	<p>F : Wall taps outlet for cold water: 1/2"</p>	<p>CFT: Wall taps with water supply by overflowing ● ● ● ●</p>
<p>total weight with package: Kg 69</p>		<p>KW 0.78</p>	<p>CB : Bath edge taps outlet for hot water: 1/2"</p>	<p>CB BF: Bath edge taps ■ ■</p>
<p>Volume with package: m3 = 0,936</p>		<p>A 4,1/3,9</p>	<p>FB : Bath edge taps outlet for cold water: 1/2"</p>	
<p>Water capacity Lt 160</p>		<p>T : Single outlet for mixed water to supply by overflowing: 1/2"</p>	<p>S : Drainage outlet istalled in the floor: 1-1/2"</p>	
		<p>E : Power outlet for the wirpool IPX5</p>	<p>E : Power outlet for the wirpool IPX5</p>	


VASCA IN ACRILICO 170X70 SX

DATI TECNICI



ACRYLIC BATHTUB LX 170X70

TECHNICAL INFO

Vista in pianta
plan view

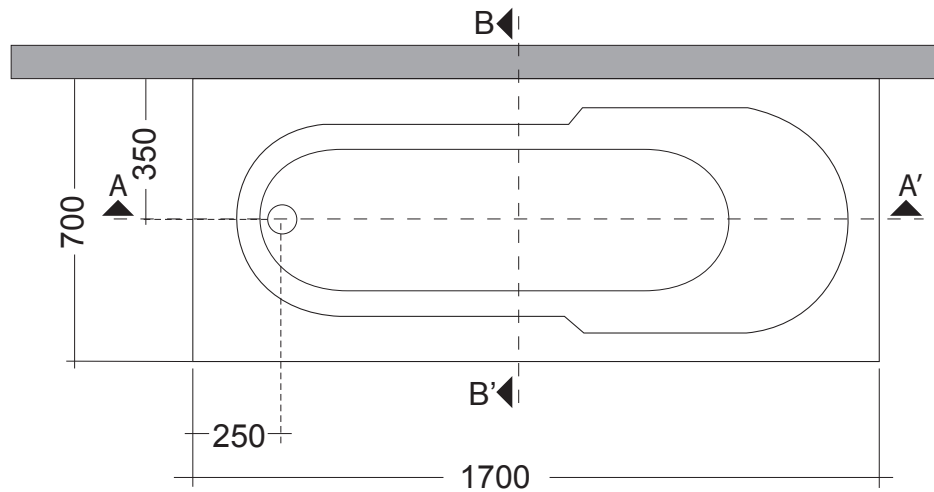

Sezione A/A'
Section A/A'

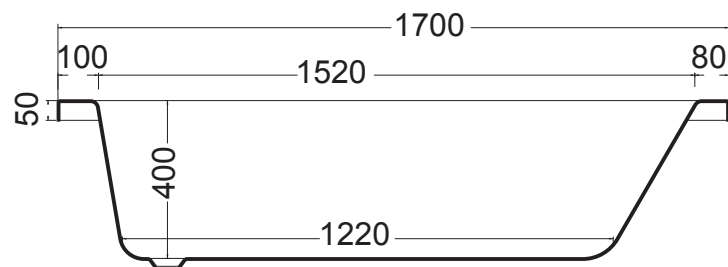


Sezione B/B'
Section B/B'

VASCA IN ACRILICO 170X70 SX

DATI TECNICI

ACRYLIC BATHTUB LX 170X70

TECHNICAL INFO

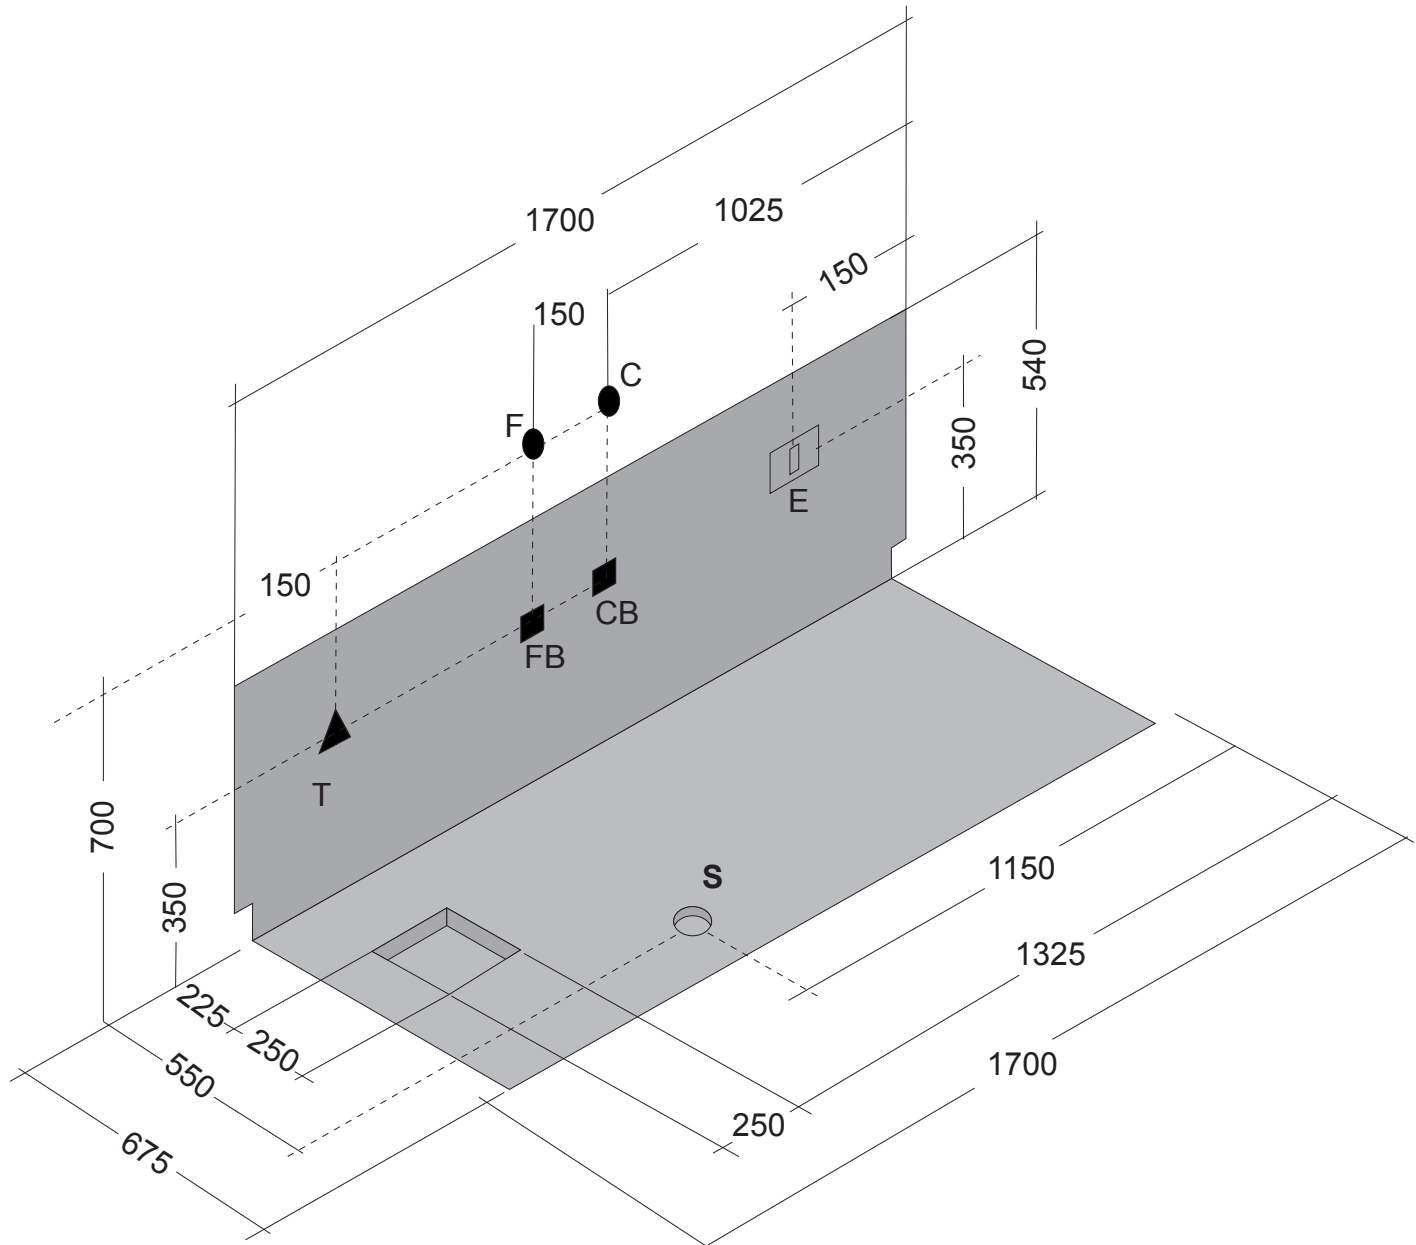

Ingombro vasca proiettato nel muro

Bath overall dimensions as projected on the wall

VASCA IN ACRILICO 170X70 SX

DATI TECNICI

ACRYLIC BATHTUB LX 170X70

TECHNICAL INFO

I	CARATTERISTICHE IDRAULICHE	CARATTERISTICHE ELETTRICHE	REQUISITI DI PREINSTALLAZIONE	COMBINAZIONI RUBINETTERIA
<p>N.B. L'INSTALLAZIONE DEVE AVVENIRE A PAVIMENTO E PARETI FINITE</p>	<p>Numero jets: 6</p>	<p>V 220/240</p>	<p>C : Allaccio acqua calda rubinetteria parete: 1/2"</p>	<p>C F : Rubinetteria parete ● ●</p>
<p>Peso netto: Kg 55 Peso spedizione: Kg 69 Volume spedizione: m3 = 0,936 Contenuto acqua: Lt 160</p>		<p>HZ 50/60</p>	<p>F : Allaccio acqua fredda rubinetteria parete: 1/2" CB : Allaccio acqua calda bordo vasca: 1/2" FB : Allaccio acqua fredda bordo vasca: 1/2"</p>	<p>CFT: Rubinetteria parete con erogazione troppopieno ● ● ● ●</p>
		<p>KW 0.78</p>	<p>T : Allaccio miscelatore per erogazione da troppopieno: 1/2"</p>	<p>CB BF: Rubinetteria bordo vasca ■ ■</p>
		<p>A 4,1/3,9</p>	<p>S : Allaccio scarico incassato a pavimento: 1-1/2" E : Allaccio elettrico idromassaggio: IPX5</p>	
GB	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	TAPS COMBINATION
<p>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED</p>	<p>Numero jets: 6</p>	<p>V 220/240</p>	<p>C : Wall taps outlet for hot water: 1/2"</p>	<p>C F : Wall taps ● ●</p>
<p>Net weight: Kg 55 total weight with package: Kg 69 Volume with package: m3 = 0,936 Water capacity</p>		<p>HZ 50/60</p>	<p>F : Wall taps outlet for cold water: 1/2" CB : Bath edge taps outlet for hot water: 1/2" FB : Bath edge taps outlet for cold water: 1/2"</p>	<p>CFT: Wall taps with water supply by overflowing ● ● ● ●</p>
		<p>KW 0.78</p>	<p>T : Single outlet for mixed water to supply by overflowing: 1/2"</p>	<p>CB BF: Bath edge taps ■ ■</p>
		<p>A 4,1/3,9</p>	<p>S : Drainage outlet istalled in the floor: 1-1/2" E : Power outlet for the wirpool: IPX5</p>	
F	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	TAPS COMBINATION
<p>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED</p>	<p>Numero jets: 6</p>	<p>V 220/240</p>	<p>C : Wall taps outlet for hot water: 1/2"</p>	<p>C F : Wall taps ● ●</p>
<p>Net weight: Kg 55 total weight with package: Kg 69 Volume with package: m3 = 0,936 Water capacity</p>		<p>HZ 50/60</p>	<p>F : Wall taps outlet for cold water: 1/2" CB : Bath edge taps outlet for hot water: 1/2" FB : Bath edge taps outlet for cold water: 1/2"</p>	<p>CFT: Wall taps with water supply by overflowing ● ● ● ●</p>
		<p>KW 0.78</p>	<p>T : Single outlet for mixed water to supply by overflowing: 1/2"</p>	<p>CB BF: Bath edge taps ■ ■</p>
		<p>A 4,1/3,9</p>	<p>S : Drainage outlet istalled in the floor: 1-1/2" E : Power outlet for the wirpool: IPX5</p>	