




Vista in pianta
plan view

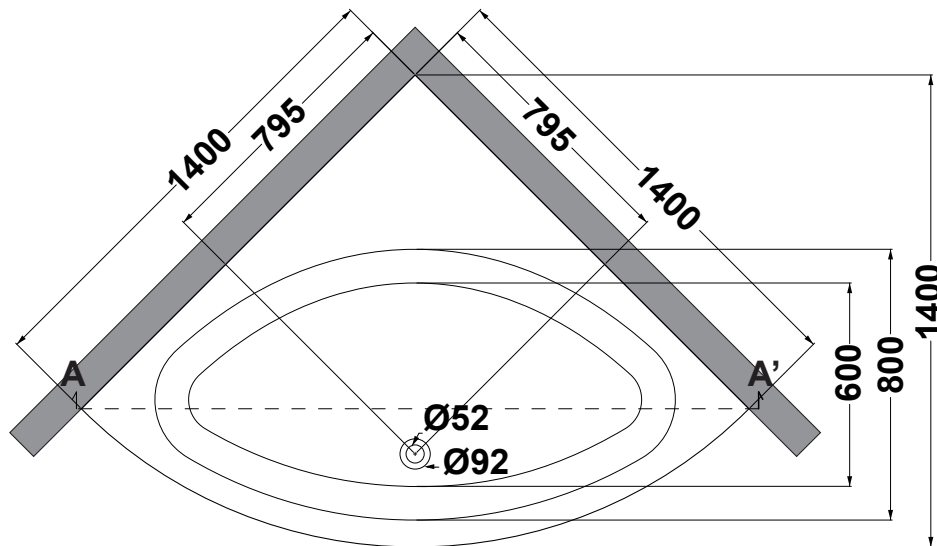

Sezione A/A'
Section A/A''

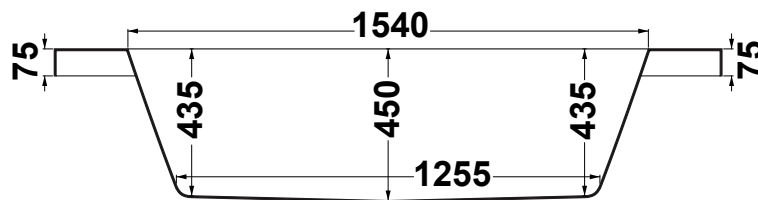

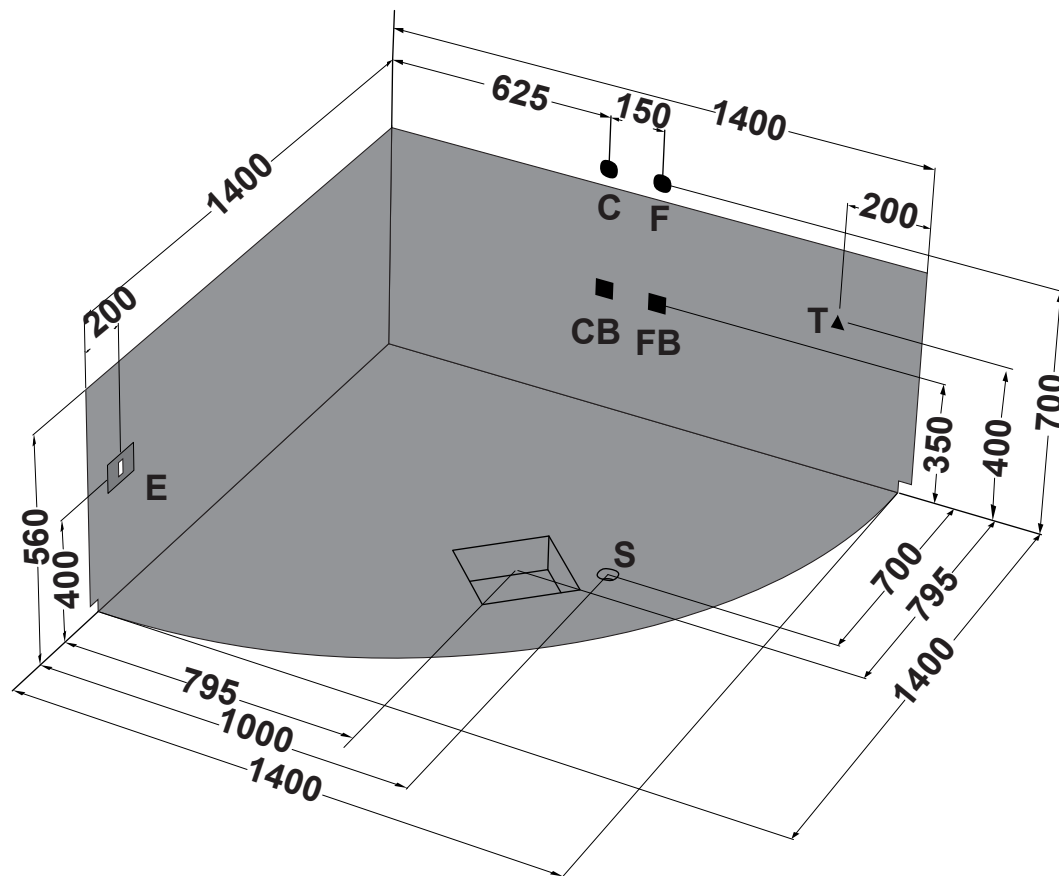

Ingombro vasca proiettato nel muro

Bath overall dimensions as projected on the wall

VASCA IN ACRILICO 140X140 ANGOLARE

DATI TECNICI

CORNER ACRYLIC BATHTUB 140X140

TECHNICAL INFO

I	CARATTERISTICHE IDRAULICHE	CARATTERISTICHE ELETTRICHE	REQUISITI DI PREINSTALLAZIONE	COMBINAZIONI RUBINETTERIA
<p>N.B. L'INSTALLAZIONE DEVE AVVENIRE A PAVIMENTO E PARETI FINITE</p> <p>Peso netto: Kg 71 Peso spedizione: Kg 76 Volume spedizione: m3 = 0,777 Contenuto acqua: Lt 240</p>	Numero jets: 6	V HZ KW A 220/240 50/60 0.78 4.5	C : Allaccio acqua calda rubinetteria parete: 1/2" F : Allaccio acqua fredda rubinetteria parete: 1/2" CB : Allaccio acqua calda bordo vasca: 1/2" FB : Allaccio acqua fredda bordo vasca: 1/2" T : Allaccio miscelatore per erogazione da troppopieno: 1/2" S : Allaccio scarico incassato a pavimento: 1-1/2" E : Allaccio elettrico idromassaggio: IPX5	C F : Rubinetteria parete ● ●
	jets airpool : 16	ELETTRO POMPA AIRPOOL V HZ KW A 220/230 50/60 0.65 3		CFT: Rubinetteria parete con erogazione troppopieno ● ● ● ●
				CB BF: Rubinetteria bordo vasca ■ ■
GB	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	TAPS COMBINATION
<p>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED</p> <p>Net weight: Kg 71 total weight with package: Kg 76 Volume with package: m3 = 0,777 Water capacity: Lt 240</p>	Numero jets: 6	V HZ KW A 220/240 50/60 0.78 4.5	C : Wall taps outlet for hot water: 1/2" F : Wall taps outlet for cold water: 1/2" CB : Bath edge taps outlet for hot water: 1/2" FB : Bath edge taps outlet for cold water: 1/2" T : Single outlet for mixed water to supply by overflowing: 1/2" S : Drainage outlet installed in the floor: 1-1/2" E : Power outlet for the wirpool: IPX5	C F : Wall taps ● ●
	jets airpool : 16	ELECTRO PUMP AIRPOOL V HZ KW A 220/230 50/60 0.65 3		CFT: Wall taps with water supply by overflowing ● ● ● ●
				CB BF: Bath edge taps ■ ■
F	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	TAPS COMBINATION
<p>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED</p> <p>Net weight: Kg 71 total weight with package: Kg 76 Volume with package: m3 = 0,777 Water capacity: Lt 240</p>	Numero jets: 6	V HZ KW A 220/240 50/60 0.78 4.5	C : Wall taps outlet for hot water: 1/2" F : Wall taps outlet for cold water: 1/2" CB : Bath edge taps outlet for hot water: 1/2" FB : Bath edge taps outlet for cold water: 1/2" T : Single outlet for mixed water to supply by overflowing: 1/2" S : Drainage outlet installed in the floor: 1-1/2" E : Power outlet for the wirpool: IPX5	C F : Wall taps ● ●
	jets airpool : 16	ELECTRO PUMP AIRPOOL V HZ KW A 220/230 50/60 0.65 3		CFT: Wall taps with water supply by overflowing ● ● ● ●
				CB BF: Bath edge taps ■ ■